



TLI-DN215

TRIMLESS RECESSED STAR LIGHT

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	CREE/Bridgelux
Color Temperature	3000/4000/5000K
Luminous Efficiency@4000K	90lm/W
CRI	>95
Beam Angle(°)	15°/24°/30°
UGR	<19(24°)
Lifetime(hr)	50,000H
Product Finishing	White/Black


EXPERIENCE



FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac/0-10v/DALI
Functions	Angle Adjustable
Ingress Protection (IP Rating)	IP20
Power Factor(PF)	≥ 0.9
Certification	SAA/ RoHS/CE

INSTALLATION & ACCESSORIES

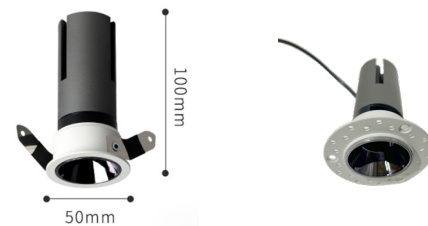

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN215-3W	3W	AC200-240V	Ø40(55)x96	Ø35	260lm
TLI-DN215-5W	5W	AC200-240V	Ø40(55)x96	Ø35	260lm
TLI-DN215-7W	7W	AC200-240V	Ø40(65)x100	Ø45	650lm