




TLI-DN216A/B

RECESSED LINEAR LIGHT

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	CREE/Bridgelux
Color Temperature	3000/4000/5000K
Luminous Efficiency@4000K	90lm/W
CRI	>95
Beam Angle(°)	15°/30°/45°
UGR	<19(24°)
Lifetime(hr)	50,000H
Product Finishing	White/Black

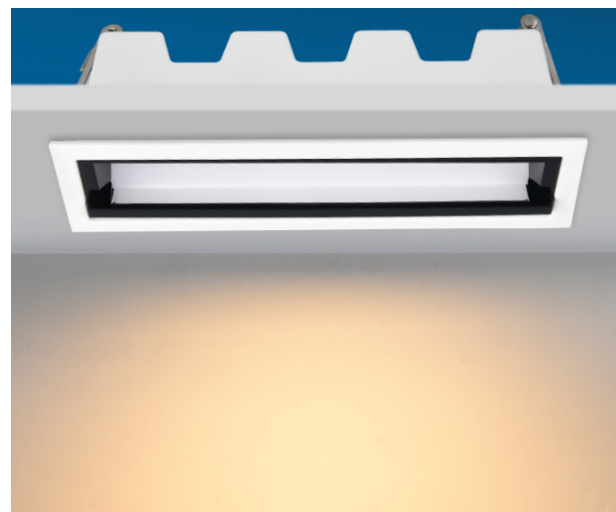

FEATURES & BENEFITS

LED Driver	Built-out
Dimming Option	Triac/0-10v/DALI
Functions	Angle Adjustable
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥ 0.9
Certification	SAA/ RoHS/CE

INSTALLATION & ACCESSORIES



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN216-A-2W	2W	AC200-240V	45x45x50	38x35	180lm
TLI-DN216-A-5W	5W	AC200-240V	75x45x50	68x35	460lm
TLI-DN216-A-7W	7W	AC200-240V	105x45x50	95x35	650lm
TLI-DN216-A-10W	10W	AC200-240V	145x45x50	136x35	950lm
TLI-DN216-A-20W	20W	AC200-240V	280x45x50	270x35	1900lm
TLI-DN216-A-30W	30W	AC200-240V	415x45x50	405x35	2800lm
TLI-DN216-B-10W	10W	AC200-240V	146x45x48	137x37	950lm
TLI-DN216-B-20W	20W	AC200-240V	280x45x49	270x37	1900lm
TLI-DN216-B-30W	30W	AC200-240V	413x45x49	403x37	2800lm