

TLI-DN219

DOWNLIGHT

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	COB (SDCM<3)
Color Temperature	3000/4000K/5500K
Luminous Efficiency@4000K	90lm/W
CRI	≥95
Beam Angle(°)	10°/50° adjustable
UGR	<19(24°)
Lifetime(hr)	50,000H
Product Finishing	Black


FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac
Ingress Protection (IP Rating)	IP20
Power Factor(PF)	≥ 0.9
Certification	SAA/ RoHS/CE

DATA SHEET


CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)
TLI-DN219-3W	3W	AC200-240V	Ø64x53	Ø55	180lm/300lm	0.20
TLI-DN219-5W	5W	AC200-240V	Ø64x53	Ø55	180lm/300lm	0.20

EXPERIENCE

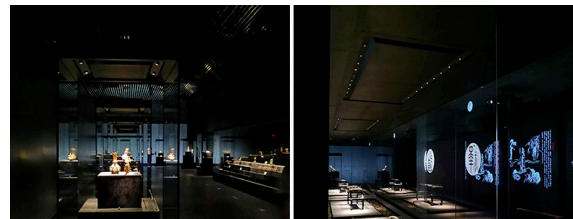

Beam Angle (10°)

Beam Angle (50°)

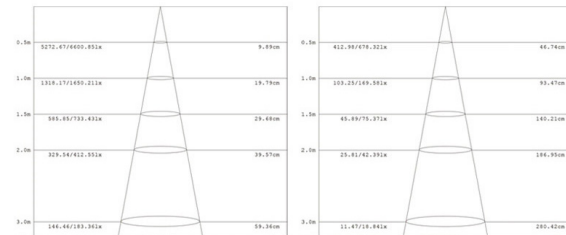

INSTALLATION & ACCESSORIES

