

TLI-DN818

TRIMLESS RECESSED PULL OUT
ADJUSTABLE DOWNLIGHT

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	CREE/Bridgelux
Color Temperature	3000/4000/5000K
Luminous Efficiency@4000K	90lm/W
CRI	>90
Beam Angle(°)	24°/36°/45°
UGR	<19(24°)
Lifetime(hr)	50,000H
Product Finishing	White


FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac/0-10v/DALI
Functions	Angle Adjustable
Ingress Protection (IP Rating)	IP20
Power Factor(PF)	≥ 0.9
Certification	SAA/ RoHS/CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN818-(5-7W)	5-7W	AC200-240V	Ø89x110	Ø65	450-630lm
TLI-DN818-(10W)	10W	AC200-240V	Ø98x110	Ø75	900lm
TLI-DN818-(12-15W)	12-15W	AC200-240V	Ø120x110	Ø95	1080-1350lm

EXPERIENCE

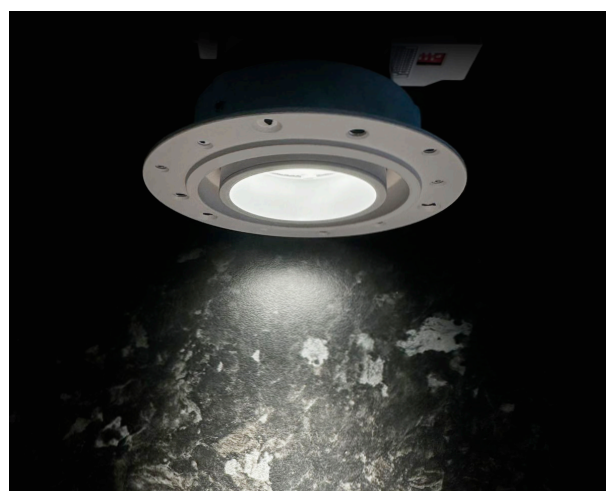

INSTALLATION & ACCESSORIES

