




TLI-PL3570



TLI-PL5075

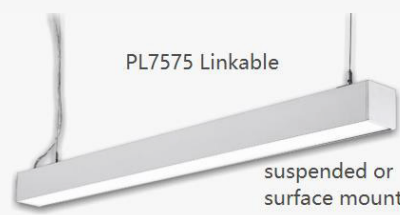

PL7575 Linkable

suspended or surface mounted

# TLI-PL7575/ 5075/ 3570

## LINKABLE LINEAR RANGE

### TECHNICAL

Materials of Optics	-
Materials of Housing	Aluminium
Light Source	CREE Osram
Color Temperature	2700/6000k
Luminous Efficiency@4000K	95Lm/W
CRI	Up to 90
Beam Angle(°)	36-120 °
UGR	-
Lifetime(hr)	40,000H
Product Finishing	White/Black


### FEATURES & BENEFITS

CCT Selection DIP Switch	-
LED Driver	Built-in
Dimming Option	DALI/ 0-10V
Functions	-
Ingress Protection (IP Rating)	IP20
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

### DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)
PL7575-1.2	40W	100-277V AC	1200X75X75	3500-3650
PL7575-1.8	60W	100-277V AC	1795X75X75	5300-5400
PL7575-2.4	80W	100-277V AC	2395X75X75	7000-7200
PL5075-1.2	40W	100-277V AC	1200X50X75	3500-3650
PL5075-1.8	60W	100-277V AC	1795X50X75	5300-5400
PL5075-2.4	80W	100-277V AC	2395X50X75	7000-7200
PL3570-1.2	40W	100-277V AC	1200X35X70	3500-3650
PL3570-1.8	60W	100-277V AC	1795X35X70	5300-5400
PL3570-2.4	80W	100-277V AC	2395X35X70	7000-7200

### OPTICS

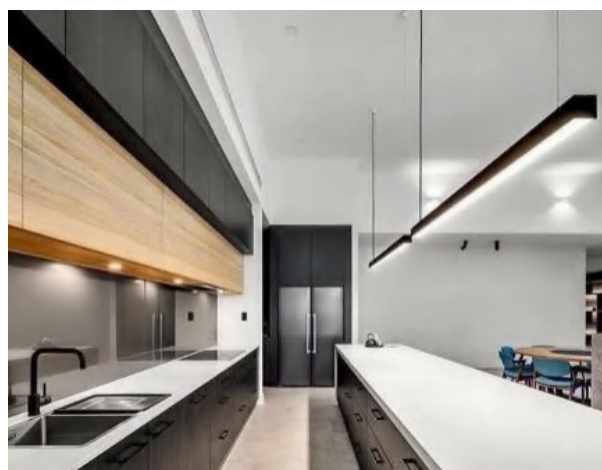

### INSTALLATION & ACCESSORIES

