




TLI-SM-1W

LED INGROUND LIGHT

TECHNICAL

Materials of Optics	-
Materials of Housing	Stainless steel
Light Source	CREE /Osram
Color Temperature	2700-6500K
Luminous Efficiency@4000K	25Lm/W
CRI	>85
Beam Angle(°)	5°/10°/15°/30°/45°/60°/90°
Lifetime(hr)	40,000h
Product Finishing	BLACK

Light distribution curve

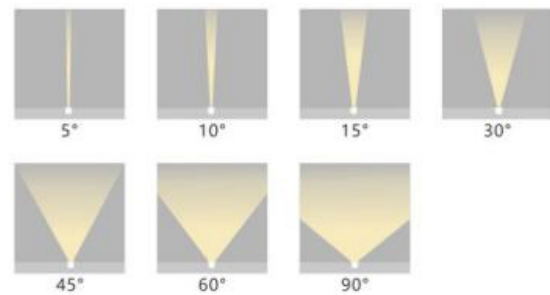

A Variety Of Styles Are Available



FEATURES & BENEFITS

LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP 67
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

INSTALLATION & ACCESSORIES



DATA SHEET

CODE	WATT	INPUT VOLTAGE	SIZE(AxBxCxDmm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-SM-1W42TG	1W	12/24V	Ø42x75	Ø38mm	25lm
TLI-SM-1W52TG	1/3W	12/24V	Ø52x75	Ø47mm	25lm/75lm
TLI-SM-1W62TG	1/3W	12/24V	Ø62x75	Ø55mm	25lm/75lm
TLI-SM-1W75TG	1/3W	12/24V	Ø75x75	Ø70mm	25lm/75lm