



# TLI-HANDRAIL-M18

## RECESSED HANDRAIL LIGHT

### TECHNICAL

Materials of Optics	PC
Materials of Housing	Stainless Steel and Aluminum
Light Source	CREE/Bridgelux
Color Temperature	2700-6500k and Blue
Luminous Efficiency@4000K	90lm/W
CRI	>95
Beam Angle(°)	15°/30°/45°
UGR	<19(24°)
Lifetime(hr)	50,000H
Product Finishing	White / Black


### FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-out
Dimming Option	Triac / 0-10v/DALI
Ingress Protection (IP Rating)	IP67
Power Factor (PF)	≥ 0.9
Certification	SAA/ RoHS/CE

### DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	Angle
TLI-DN213-M18/A	1.2W	24V DC	Ø18x26mm	30°/55°
TLI-DN213-M18/B	1.2W	24V DC	Ø18x30mm	Asymmetric-55°

### OPTICS

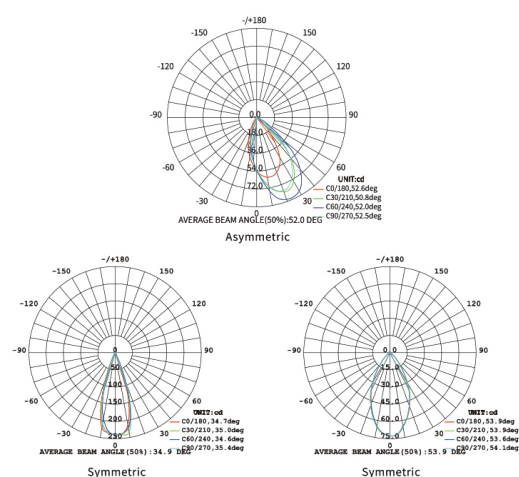

### INSTALLATION & ACCESSORIES

