

TLI-WL10886

RECESSED STEP LIGHT

TECHNICAL


Materials of Housing	Plaster + Aluminium
Light Source	LED
Color Temperature	3000K
Luminous Efficiency@4000K	60Lm
CRI	≥90Ra
Beam Angle(°)	29°
Lifetime(hr)	50,000h
Product Finishing	White



FEATURES & BENEFITS

CCT Selection DIP Switch	-
LED Driver	Built-in
Power Factor (PF)	≥0.9
Certification	RoHS/CE

INSTALLATION & ACCESSORIES

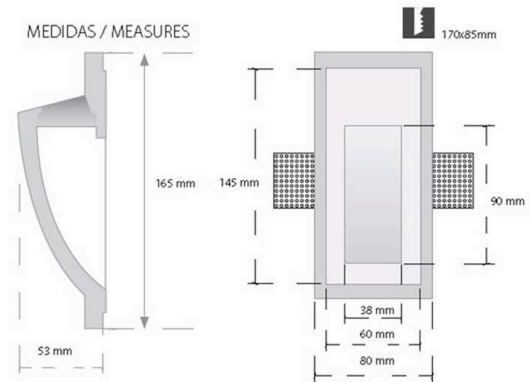

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSIONS	CUT-OUT(mm)
TLI-WL10886	3W	AC220-240V	80x48x165	170x85