




TLI-WL10889


CYLINDRICAL SURFACE-MOUNTED LINEAR LIGHT

TECHNICAL

Materials of Optics	Acrylic
Materials of Housing	Aluminum
Light Source	OSRAM
Color Temperature	3000/4000/5500k
Luminous Efficiency@4000K	10lm/W
CRI	≥80
Lifetime(hr)	50,000h
Product Finishing	Matte Black

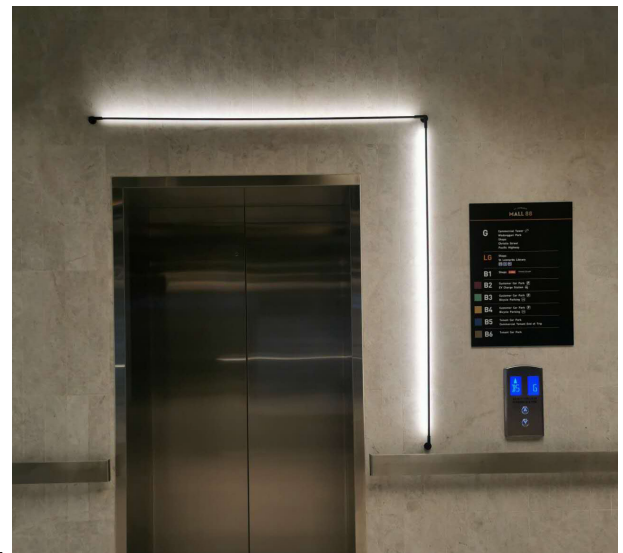

INSTALLATION & ACCESSORIES

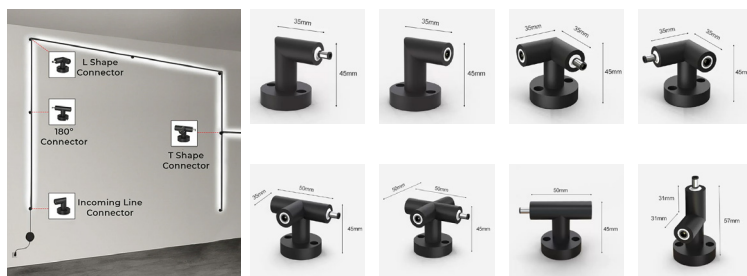

Light Angle Efficiency

3000K

4000K

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSIONS	LUMEN(±5%)
TLI-WL10889-50	5W	24V	Ø12x500	50lm
TLI-WL10889-750	8W	24V	Ø12x750	80lm
TLI-WL10889-1000	10W	24V	Ø12x1000	100lm
TLI-WL10889-1500	12W	24V	Ø12x1000	1500lm
TLI-WL10889-2000	16W	24V	Ø12x1000	2000lm
TLI-WL10889-End-Conn-Male	-	-	35x45	-
TLI-WL10889-End-Conn-Female	-	-	35x45	-
TLI-WL10889-L-Conn-R	-	-	35x35x45	-
TLI-WL10889-L-Conn-L	-	-	35x35x45	-
TLI-WL10889-T-Conn	-	-	35x50x45	-
TLI-WL10889-Cross-Conn	-	-	50x50x45	-
TLI-WL10889-180-Conn	-	-	50x45	-
TLI-WL10889-Corner-Conn	-	-	31x31x57	-