

## TLI-WL-WR65

WALL LIGHT BUBBLE GLASS  
WITH BRASS BASE

### TECHNICAL


Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	SMD
Color Temperature	3000/4000/5000K
Luminous Efficiency@4000K	90lm/W
CRI	≥80
Beam Angle(°)	100°
UGR	<19(24°)
Lifetime(hr)	50,000H
Product Finishing	Black/White/Silver



### FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-out
Dimming Option	Triac
Ingress Protection (IP Rating)	IP65
Impact Resistance (IK Rating)	IK08
Power Factor (PF)	≥ 0.9
Certification	SAA/ RoHS/CE

### DIMENSION

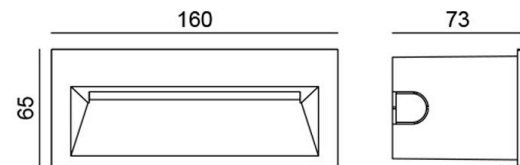

### DATA SHEET

CODE	WATT	LED TYPE	LUMINOUS FLUX	CRI	Beam Angle(°)
TLI-WL-WR65160	5W	SMD2835	180lm	≥80	100°
TLI-WL-WR65220	10W	SMD2835	370lm	≥80	100°
TLI-WL-WR65280	10W	SMD2835	400lm	≥80	100°