


# TLI-INGROUND

## RECESSED IN-GROUND LIGHT

### TECHNICAL

Materials of Optics	Glass
Materials of Housing	Stainless Steel and Aluminum
Light Source	CREE/Bridgelux
Color Temperature	0.5W/1W/2W/3W RGB 3IN1/4W RGBW 4IN1 LED
Luminous Efficiency@4000K	90lm/W
CRI	>80
Beam Angle(°)	15°/30°/45°
UGR	<19(24°)
Lifetime(hr)	50,000H
Product Finishing	White RAL9016/ Black RAL9005

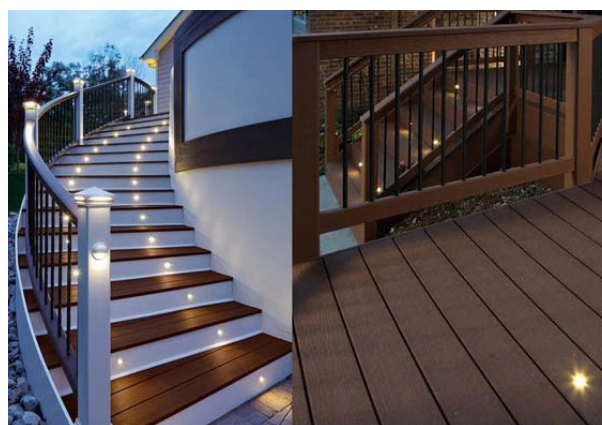

### FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-out
Dimming Option	Triac/0-10v/DALI
Ingress Protection (IP Rating)	IP67
Impact Resistance (IK Rating)	IK10
Power Factor (PF)	≥ 0.9
Certification	SAA/ RoHS/CE

### DATA SHEET

CODE	WATT	INPUT VOLTAGE	LUMEN(±5%)
TLI-INGROUND	3W	AC 240V	270lm

### INSTALLATION & ACCESSORIES

